PD520516

TECHNICAL SUPPORT

1.855.855.8926 technicalsupport@aloralighting.com

# WARNINGS AND CAUTIONS

· Make sure POWER is COMPLETELY OFF at the fuse box

Please Note:

· Have your fixture installed by a qualified licensed electrician

· 120V input

- · Prepare everything in a clear area
- $\cdot$  Wear gloves at all times during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

## **NOTICE**

- The important safeguards and instructions outlined in this sheet cannot
  cover all possible conditions and situations that may occur. It must be
  understood that caution and certain care factors must be followed. These
  instructions are provided for your safety and we highly recommend that a
  licensed, trained electrician install this unit.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box OR through a wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used, directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

# **ASSEMBLY INSTRUCTIONS**

#### Step 1

Remove fixture from its original package.

#### Step 2

Remove the mounting plate (1c) from within the canopy (2a) by loosening the mounting collar nut (2b).

#### Step 3

Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package.

## Step 4

Determine hanging height of fixture by securing rods (2d) to swivel (2e) and fixture (3a) after feeding fixture wires through rods.

#### Step 5

Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts (1b) provided in hardware package.


#### Sten 6

Attach canopy (2a) to mounting plate (1c) by threading mounting collar nut (2b) onto swivel (2e).

#### Step

Attach shade (3c) to fixture (3a) and secure with shade connector (3d). Install the recommended lamp (3b) (not provided) (referred on the socket label for maximum wattage and type) to fixture socket.

You are now ready to enjoy your fixture.

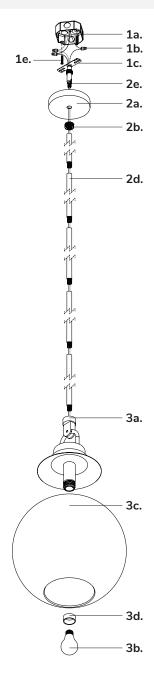



P. 1.855.855.8926

CANADA: 19054 28th Ave., - Surrey, BC V3Z 6M3

USA: 3035 E. Lone Mountain Rd. - Las Vegas, NV 89081

www.aloramood.com

20220101