Lancaster

PD461104

MARNINGS AND CAUTIONS

 \cdot Make sure $\ensuremath{\textbf{POWER}}$ is $\ensuremath{\textbf{COMPLETELY OFF}}$ at the fuse box

Please Note: · 120V input

- \cdot Have your fixture installed by a qualified licensed electrician
- \cdot Prepare everything in a clear area
- \cdot Wear gloves at all times during this installation
- \cdot Read instructions carefully before you start assembly

 \cdot Keep this installation sheet for future reference

NOTICE

- The important safeguards and instructions outlined in this sheet cannot cover all possible conditions and situations that may occur. It must be understood that caution and certain care factors must be followed. These instructions are provided for your safety and we highly recommend that a licensed, trained electrician install this unit.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box OR through a wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used, directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

ASSEMBLY INSTRUCTIONS

Step 1

Remove fixture from its original package.

Step 2

Separate mounting plate (1c) from canopy (2a) by loosening mounting collar nut (2f).

Step 3

Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package. Attach canopy pivot (2e) to mounting plate (1c) by threading clockwise.

Step 4

Run wires through shade (3b) and ring (3d). Attach shade (3b) to fixture body (3a) with ring (3d) and secure with screws (3c).

Step 5

Install recommended lamps (4a) (not provided) (referred on the socket label for maximum wattage and type) to fixture sockets (4b).

Step 6

Determine hanging height of fixture by securing rods (2d) to canopy pivot (2e) and fixture body (3a) after feeding fixture wires through rods.


Step 7

Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to **"GND"**) with wire nuts (1b) provided in hardware package.

Step 8

Attach canopy (2a) to mounting plate (1c) by threading mounting collar nut (2f) onto canopy pivot (2e).

You are now ready to enjoy your fixture.

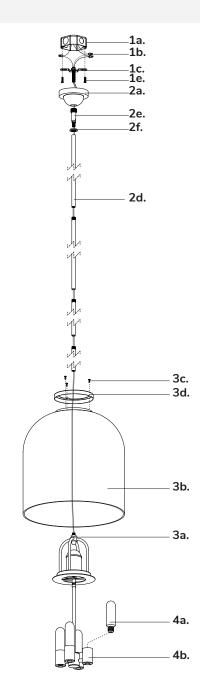

alora mood P. 1.855.855.8926
CANADA: 19054 28th Ave., - Surrey, BC V3Z 6M3
USA: 3035 E. Lone Mountain Rd. - Las Vegas, NV 89081
www.aloramood.com
20230109