# SF332919

Semi-Flush

# WARNINGS AND CAUTIONS

- Make sure POWER is COMPLETELY OFF at the fuse box
- · Have your fixture installed by a qualified licensed electrician

• Prepare everything in a clear area

- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

# NOTICE

- The important safeguards and instructions outlined in this sheet cannot cover all possible conditions and situations that may occur. It must be understood that caution and certain care factors must be followed. These instructions are provided for your safety and we highly recommend that a licensed, trained electrician install this unit.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box OR through a wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used, directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

# ASSEMBLY INSTRUCTIONS

#### Step 1

Remove fixture from its original package.

#### Step 2

Separate mounting plate (1c) from fixture (2a) by removing nuts (6a) and decorative nuts (2c).

#### Step 3

Align mounting plate screws (1d) to desired orientation, and then attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package.

# Step 4

Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1g).

# Step 5

Pull aircraft cable (5c) through mounting plate (1c) and loop it through mounting plate (1c). Secure aircraft cable (5c) in aircraft barrel (5a) with screws (5b).

# Step 6

Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to "**GND**") with wire nuts (1b) provided in hardware package.

# Step 7

Align and insert mounting plate screws (1d) through holes on fixture (2a), secure with nuts (6a) and decorative nuts (2c).

# Step 8

Install the recommended lamp (4a) (not provided) (referred on the socket label for maximum wattage and type) to fixture socket. Align and insert shade (3a) through holes on fixture (2a), secure with screws (3b).


You are now ready to enjoy your fixture.





• 120V input

**TECHNICAL SUPPORT** 

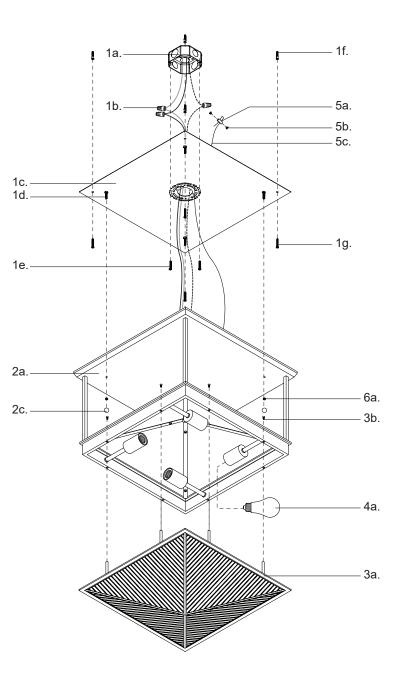

P: 1.855.855.8926 CANADA : 19054 28th Avenue Surrey - BC V3Z 6M3 USA : 3035 E. Lone Mountain Rd - Las Vegas, NV, 89081 www.aloralighting.com 20230817

1001/1